



Copyright 2004 - 2010

### SILICONE INSTALLATION INSTRUCTIONS

**ONLY USE: GE “Silicone” I or II CLEAR “rubber sealant”**  
**Do not use Liquid Nails, DAP, LePage PL, Polyseamseal**

**Tools/Equipment:** Caulking Gun (300 ml) + Cleaning Rag + Solvent

Only use GE Silicone I or II

1. Double check measurements to ensure the correct number of **Boing** pieces to do the job

2. Ensure that non-porous surfaces are clean and dry (painted or unpainted)  
★ Sheetrock/Drywall/Gyprock /Concrete block/Ceramic tile/Metal/Wood etc  
★ Seal/Waterproof moist/damp areas



Buy at Home Depot/Lowes/ACE, etc)

3. Cutting to Size  
• all **Boing** products can be cut to size with a very sharp, thin blade knife.  
• best to “seal” any exposed foam with a thin film of silicone adhesive  
Option : If you want a custom fit with no exposed foam:  
• measure the total space to be covered  
• cut out a piece from the center of the **Boing** pad equal to the excess length  
• re-connect the 2 remaining sections



4. Apply silicone to the back side of the **wall pad, corner strip, jumbo guard**  
• start with a bead around the outer edge  
• keep the perimeter bead about **1/4" from the edge**  
• add more silicone in a **Zig Zag** pattern

5. Attach to surface after applying silicone:  
a. Wall Panels or Corner Strips or Jumbo Corner Guards  
• immediately place the wall pad or corner in the location you desire  
• make any last minute positioning adjustments  
• press a little harder all over the panel/strip to ensure a good bond  
• for each full panel, press 30-60 seconds  
• for each corner strip or corner guard, press 20-30 seconds  
• in the meantime, 2<sup>nd</sup> person can start applying silicone to other sections  
b. Post Pads  
• place one half of the set on the post in the location you desire  
• place the second half on the opposite side of the post  
• ensure that the tongue & groove outer edges match up (male to female)  
• connect the 2 tongue & groove edges  
• use strong tape or plastic ties (18") to temporarily hold pads in place

6. Add a small “bead” of silicone around the outer edges to limit attempts to peel off.  
• clean off any excess silicone - see Silicone Removal on website FAQ’s

7. Do not touch for at least 12 hours (24 hours to fully cure)

### SILICONE REMOVAL - use DAP “Silicone-Be-Gone”

### DAILY/WEEKLY CLEANING & MAINTENANCE:

Use any general household cleaner + soft cloth


**Do not** use harsh abrasive scrubbing agents

**Do not** use strong chemicals like Citrus spray or Bleach

**USE BY DATE**  
Do not use after “Use By” date

**Silicone Adhesive Safety:**  
Read safety instructions on tube

One tube of silicone\* is good for:  
2-3 Wall Pads  
6-8 Corner Strips  
12-14 Jumbo Corner Guards  
2 Sets Post Pads  
  
\* 10 oz or 299 ml tube

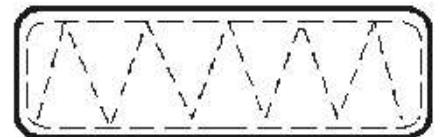

**WET AREAS**  
★ moisture will affect the adhesive  
★ make sure all areas are clean/dry  
★ seal/waterproof all surfaces  
★ ensure bead of sealant around edge



**\* The aluminum reinforced corner strips are generally attached with screws (provided)**